


# 774 Soft Amber Key 1

[View on leefilters.com](#) / [Find a Dealer](#)


Used for producing a warm key light colour. Flame retardant.

|                | Source C<br>6774K | Tungsten<br>3200K |
|----------------|-------------------|-------------------|
| Transmission Y | 70.6%             | 62.8%             |
| x              | 0.366             | 0.474             |
| y              | 0.348             | 0.403             |
| Stop Value     | $\frac{2}{3}$     | $\frac{2}{3}$     |

Light transmitted (Y%)  
for each colour  
wavelength (nm)

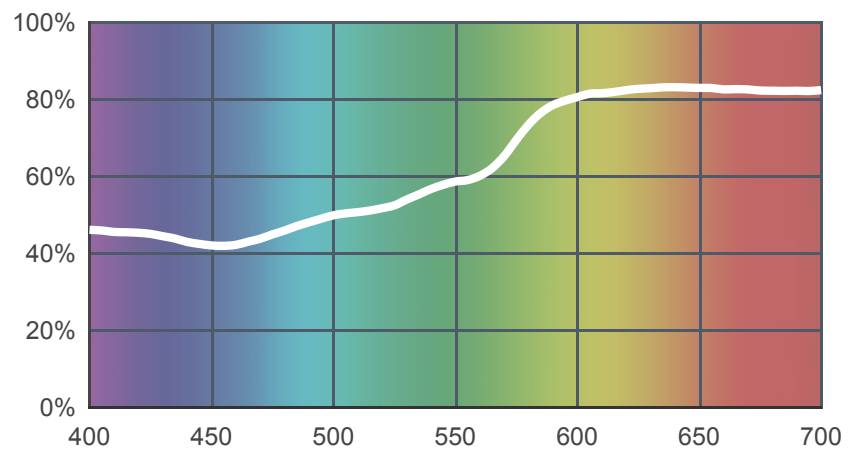

## Dimming Source Preview

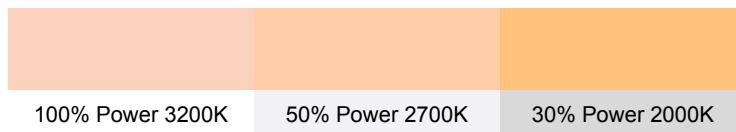

Created by **Jakob Holst** as a part of The Designer Series.

### Rolls:

- **1" Core** 7.62m x 1.22m (25' x 48")
- **2" Core** 7.62m x 1.22m (25' x 48")
- **Quick Roll** Length 7.62m (25') x any width between 2.5cm - 1.17m (1" x 48")

### Sheets:

- **Full Sheet** 1.22m x 0.53m (48" x 21")  
USA: Full Sheets by special order only.
- **Half Sheet** 0.61m x 0.53m (24" x 21")

### Pre-Cut Packs:

- Not available in a pack

# LEE Filters