



FEATURES

3-in-1 Smart Hybrid Beam, Spot, Wash Luminaire New Philips[™] MSD Platinum 200 Flex Lamp Up To 6,000 Lamp Hours* FLEX Lamp Technology from 190 to 280W + Hibernation Motorized Zoom: 1° - 18° Beam, 3° - 27° Spot, 5° - 33° Wash **Full Frost Filter for Wash Effects** Full CMY Color Mixing System 13 Colors including Quad Color, CTB, CTO, and UV 8 Rotating Interchangeable Glass Gobos 12 Static-Stamped Metal Gobos **16-Facet and 4-Facet Linear Rotating Prisms** Multiple CMY Color, Gobo, and Prism Macros **Motorized Focus with Auto-Focus Feature** DMX, RDM, Art-NET, and sACN Support Elation's E-FLY™Internal Wireless DMX Transceiver Ultimate Warranty** - Comprehensive 2 Years / 6,000 Hours





Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com



The **SMARTY HYBRID™** is a compact full featured CMY color mixing spot, beam, and wash hybrid luminaire featuring the all new Philips[™] MSD Platinum 200 Flex lamp with "FLEX" technology which uses a smartly designed discharge lamp/ ballast package to produce high output and compact performance at an efficient, long life solution of up to 6,000 hours. Features include 11,000 total lumen output, motorized zoom ranges of 1° to 18° in beam mode, 3° to 27° in spot mode, and 5° to 33° in wash mode, a full CMY color mixing system, a full frost filter for wash effects, 13 dichroic colors including a guad-color filter, CTB, CTO, and UV, 8 rotatinginterchangeable glass and 12 static-stamped metal gobos, a 16-facet and 4-facet linear independent rotating prisms, multiple CMY color, gobo, and prism macros, motorized focus with an auto-focus feature, high speed shutter and strobe, lamp hibernation mode, DMX, RDM (Remote Device Management), Art-NET, and sACN protocol support, Elation's E-FLY[™] internal wireless DMX transceiver, 5pin XLR, RJ45 ethernet, and Locking Power Cable in/out connections, full color 180° reversible LCD menu display with battery backup, a multivoltage universal auto switching power supply (100-240V), and a comprehensive 2-year / 6,000 hour ultimate warranty**.



+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

ELATION SMARTY HYBRID Product Specification Sheet

specifications | ELATION SMARTY HYBRID | www.elationlighting.com

PRODUCT SPECIFICATIONS

SOURCE

Philips MSD Platinum 200 Flex 280W Lamp Up To 6,000 Hours Lamp Life* "May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, Dimming, and Lamp Mode.

PHOTOMETRIC DATA

11,000 Total Lumen Output 128,426 LUX 11,931 FC @49.2' (15m) (Min Zoom Beam) 135,108 LUX 12,552 FC @16.4' (5m) (Min Zoom Spot) 138,576 LUX 12,874 FC @16.4' (5m) (Min Zoom Wash)

EFFECTS

Beam, Spot, and Wash Modes Motorized Zoom: 1° to 18° Beam and 3° to 27° Spot Full Frost Filter for Wash Effects 16-Facet and 4-Facet Linear Rotating Prisms CMY Color, Gobo, and Prism Macros Motorized Focus with Auto-Focus Feature High Speed Shutter and Strobe

COLOR

Full CMY Color Mixing System 13 Colors including Quad Color, CTB, CTO, and UV

GOBOS

2 Gobo Wheels 8 Interchangeable-Rotating / Indexing Glass Gobos 12 Static-Stamped Metal Gobos

CONTROL / CONNECTIONS

2 DMX Channel Modes (20 / 34 channels) Full Color 180° Reversible LCD Menu Display 6 Button Menu Control Panel 16 Bit Resolution Adjustable Movement DMX, RDM, Art-NET, and sACN Protocol Support Elation E-FLY Internal Wireless DMX Transceiver 5pin DMX and RJ45 ethernet In/Out Locking Power Cable In/Out

SIZE / WEIGHT

Length: 15.2" (385mm) Width: 15.9" (405mm) Vertical Height: 24.0" (610mm) Weight: 49.0 lbs. (22.2 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz 480W Max Power Consumption 14°F to 113°F (-10°C to 45°C)

IP20

APPROVALS / RATINGS

CE




ORDERING INFORMATION


ESH241	SMARTY HYBRID
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
DRCSMARTY	Dual Road Case For SMARTY HYBRID
EFL001	E-FLY™ Wireless DMX Transceiver
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
NEU088	3 ft. (1m) Power Link Cable
CAT6PRO5	5 ft. (1.5m) CAT6 Ethernet Cable
ZB-MSD PLATINUM 200 FLEX	Philips MSD Platinum 200 Flex Lamp





Specifications are subject to change without notice ©Elation Professional 03/12/19 Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

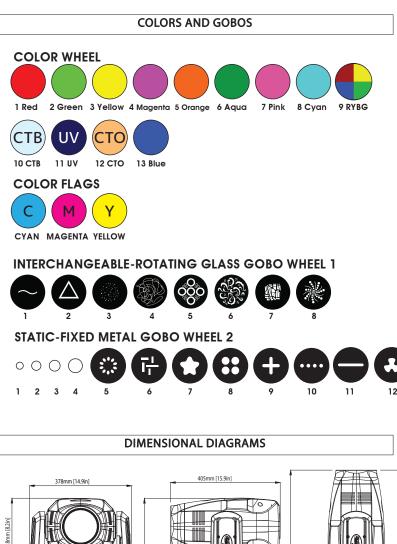









Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu